AXOR

AXOR Starck

Single lever manual shower mixer for exposed installation with pin handle

Surfaces: Art. no. : 10611800



product features


· designed to run 1 function

· Centre distance: 150 mm ± 16 mm

- · Maximum flow rate (at 3 bar): 28 l/min
- · Flow rate of hand shower (at 3 bar): 16 l/min
- · ceramic cartridge
- Maximum temperature can be adjusted on installation
- · non-return valve
- · hose connection 1/2"
- Connection type: S connections
 Min. operating pressure: 1 bar
 Max. operating pressure: 10 bar
- · non thermostatic





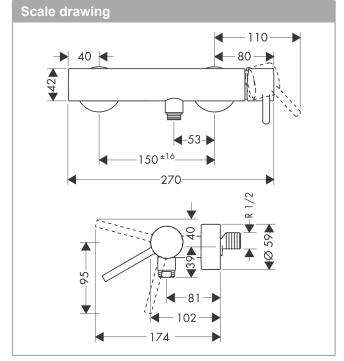

AXOR

AXOR Starck

Single lever manual shower mixer for exposed installation with pin handle

Surfaces: Art. no. : 10611800



