

AXOR Starck
Thermostat HighFlow for concealed installation
Surfaces: Article Number: **10715140**



product features

- thermostat cartridge
- maximum flow rate at 3 bar: 59 l/min
- flow rate upper outlet: 42 l/min
- flow rate lower outlet: 42 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 40 °C
- temperature limitation adjustable
- non-return valve
- with silencer
- connection type: basic set


Certificates



Product image



Scale drawing

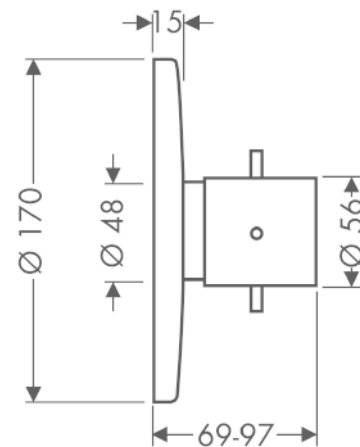

AXOR Starck
Thermostat HighFlow for concealed installation
 Surfaces: Article Number: **10715140**



Flowchart

