

AXOR ShowerSolutions

Basic set for thermostatic module 360/120 for concealed installation

Surfaces: Article Number: **10750180**




product features

- connection from left or right
- 3 outlets can be used simultaneously
- connection dimension: DN20
- flow rate at free through-flow: 59 l/min
- spindle valves
- horizontal or vertical installation
- sound-decoupled installation
- in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning

Product image






Scale drawing

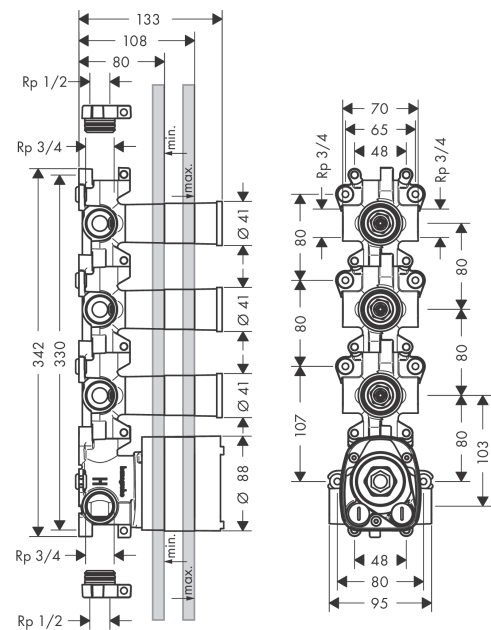

AXOR ShowerSolutions
Basic set for thermostatic module 360/120 for concealed installation
 Surfaces: Article Number: **10750180**



Installation examples

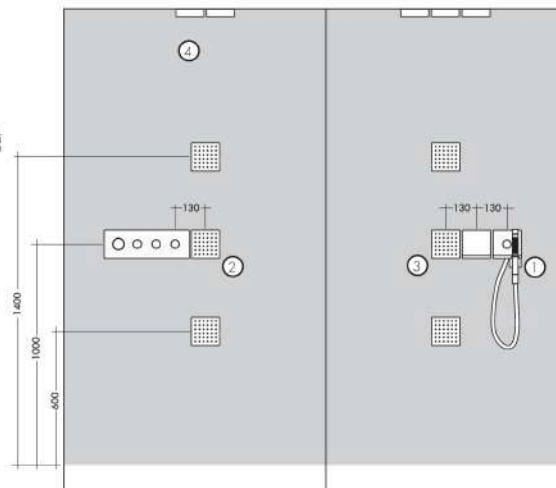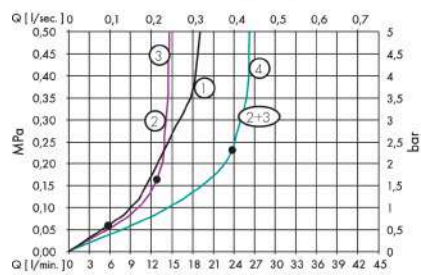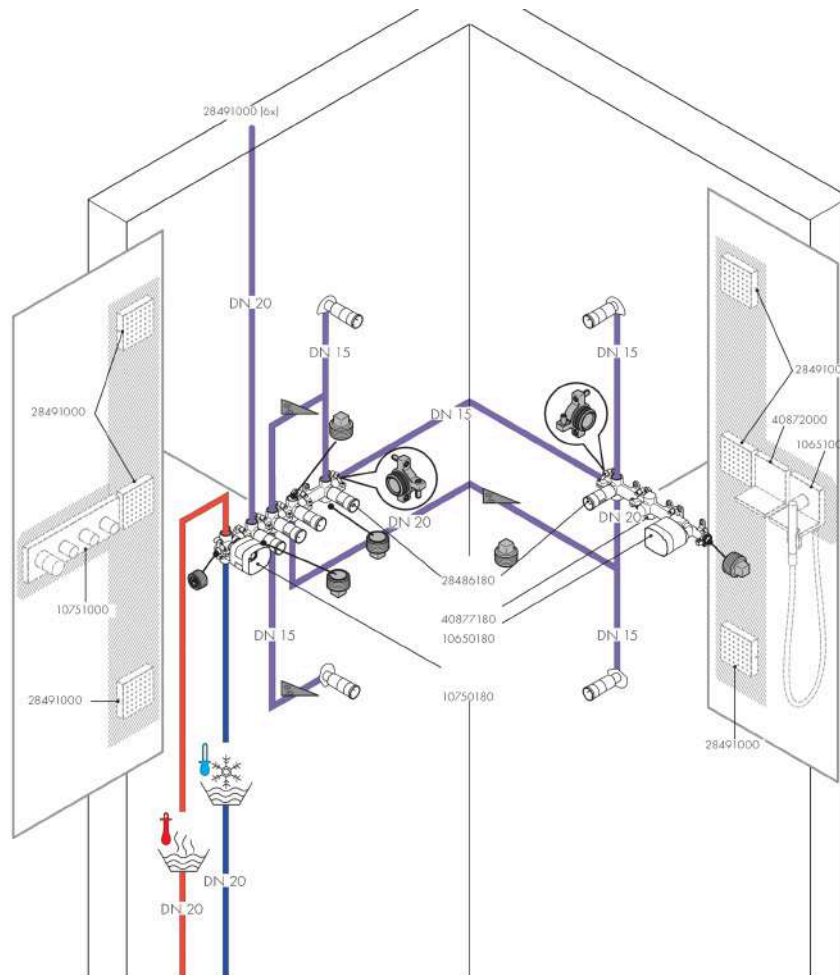


AXOR ShowerSolutions
Basic set for thermostatic module 360/120 for concealed installation
 Surfaces: Article Number: 10750180



Exploded Drawing

Year of production: >03/15

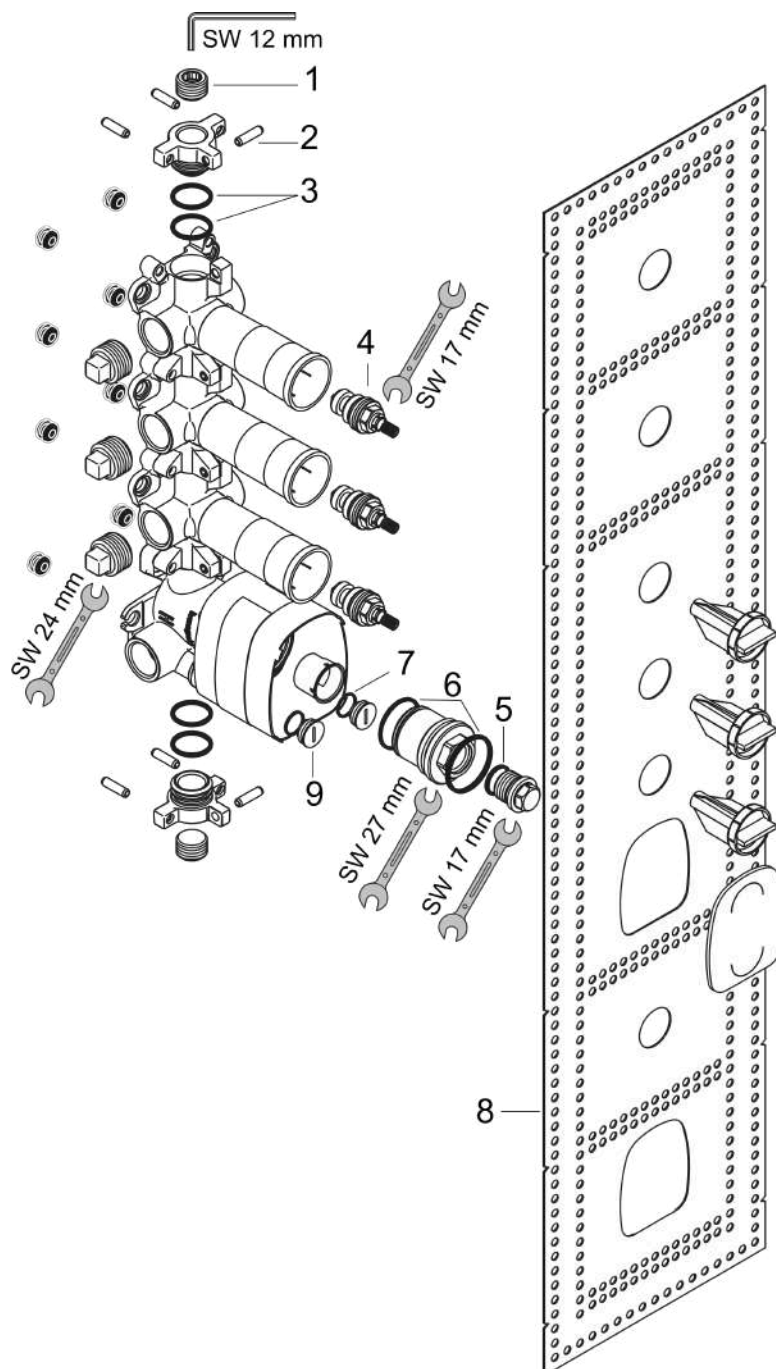

AXOR ShowerSolutions

Basic set for thermostatic module 360/120 for concealed installation

Surfaces: Article Number: **10750180**



Spare part list

Year of production: >03/15

Pos.		Article Number	PC	PU
1	plug	97998000	3	1
2	pin	95334000	5	1
3	O-Ring 23x2,5	98183000	1	1
4	shut off unit with spindle 1/2"	94142000	8	1
5	O-ring 18x2	98181000	2	1
6	O-ring 38x2,5	98198000	2	1
7	O-ring 15x1,5	92118000	1	1
8	sealing foil	95336000	8	1
9	plug	92859000	6	1