

AXOR Edge

Thermostatic module Select 470/100 for concealed installation for 2 outlets

Surfaces: Art. no. : **46700330**




product features

- Consists of: Thermostatic module, shower holder, baton hand shower, shower hose
- designed to run 2 outlets
- thermostat cartridge, start/ stop cartridge
- depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- Select push button on / off control for 2 outlets
- multiple outlets can be run simultaneously
- concealed installation
- Maximum flow rate (at 3 bar): 35 l/min
- flow rate hand shower connection 14 l/min at 3 bar
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- Hose nut: for shower hoses with cylindrical nut on both sides
- Connection type: basic set
- Noise class: I
- thermostat is delivered with buttons Handshower and RainLarge
- WRAS 2006331
- WRAS 2006331 - WRAS 2006331_approval_letter

Article Details

Price excl. VAT £ 2,741.90

Technology



Design awards



Certificates



AXOR Edge

Thermostatic module Select 470/100 for concealed installation for 2 outlets


Surfaces: Art. no. : 46700330



Product image



Scale drawing

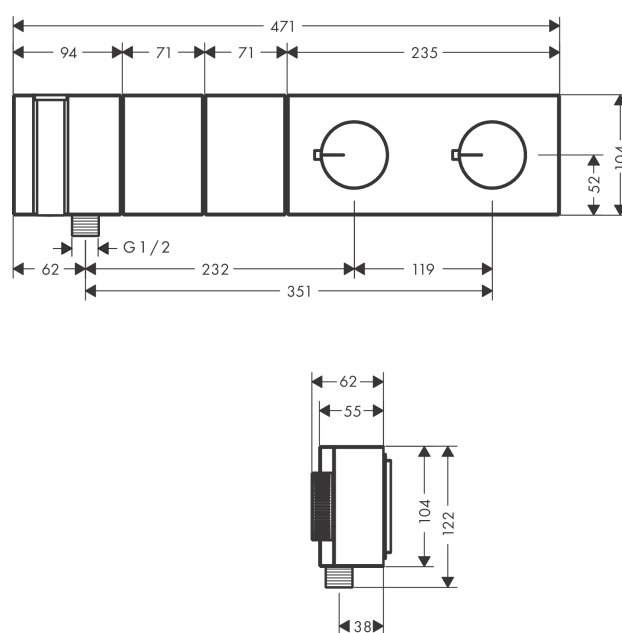

Flowchart

