

## AXOR Edge

Thermostatic module Select 680/100 for concealed installation for 5 outlets

Surfaces: Art. no. : 46730330




### product features

- Consists of: Thermostatic module, shower holder, baton hand shower, shower hose
- 5 outlets
- thermostat cartridge, start/ stop cartridge
- depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- Select push-button on/off control for 5 outlets
- multiple outlets can be run simultaneously
- concealed installation
- Maximum flow rate (at 3 bar): 38 l/min
- flow rate hand shower connection 14 l/min at 3 bar
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- Hose nut: for shower hoses with cylindrical nut on both sides
- Connection type: basic set
- Noise class: I
- Thermostat is delivered with buttons RainLarge, Handshower, Mono, PowderRain Inside and PowderRain Outside
- WRAS 2006331
- WRAS 2006331 - WRAS 2006331\_approval\_letter

### Article Details

Price excl. VAT £ 4,494.00

### Technology



### Design awards



### Certificates



## AXOR Edge

Thermostatic module Select 680/100 for concealed installation for 5 outlets


Surfaces: Art. no. : 46730330



### Product image



### Scale drawing

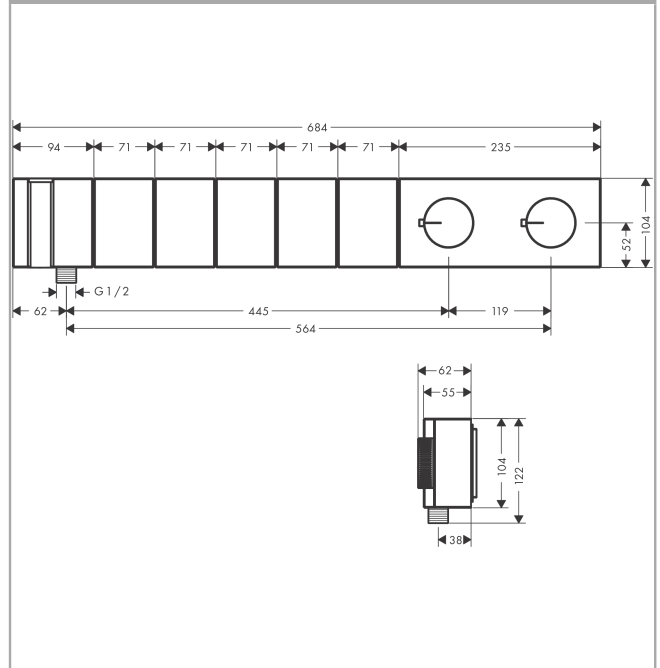

### Flowchart

