


JAPAN

BeauLet°



www.arca-2011.co.jp

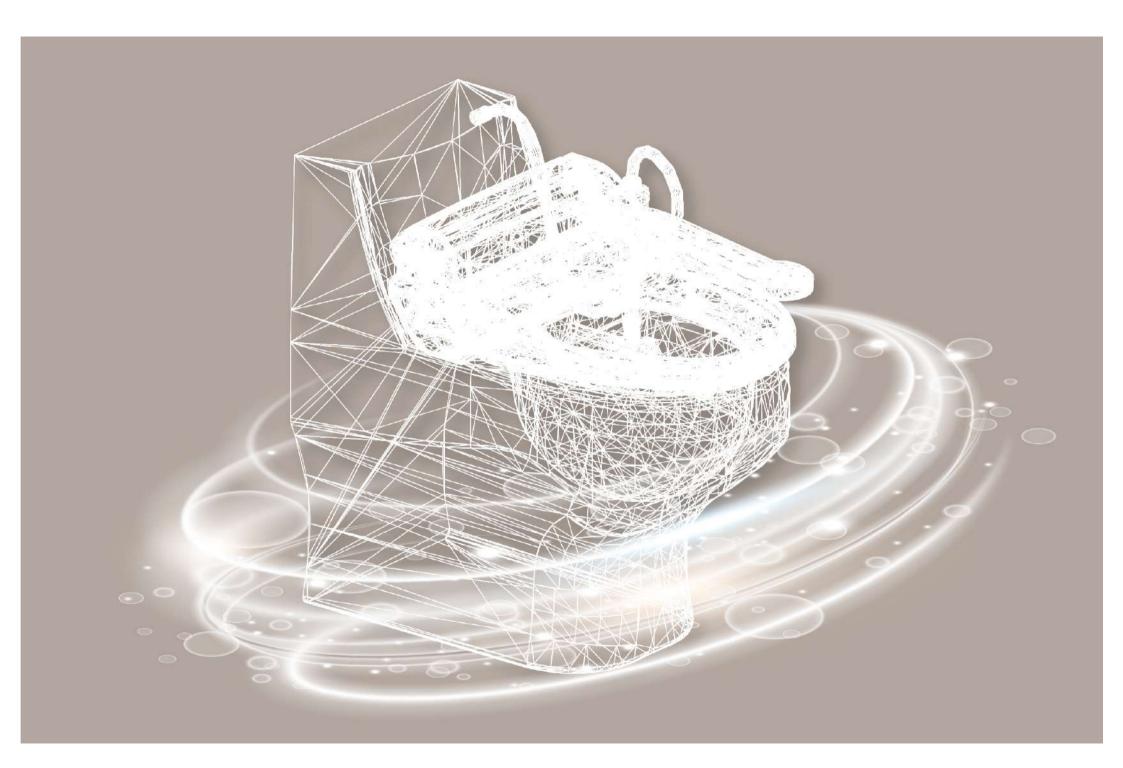

Beaulet®

Since 2011, ARCA has been committed to developing and manufacturing this electronic bidet seat, in order to create a brand new product with Japanese technology.

UPCOMING PRODUCT



MODEL: KL - 03 - EN

- Integrated Toilet
- Auto-Flush

Size	660*405*526mm	
Wall~Flush Center	305mm	j,
Cord	1.4m	7
Seat	Instant Heating	, i
Seat Temperature	34°C~40°C	
Temp. Adjustment	5 levels	(1)
Water Pressure	0.1Mpa~ 0.75Mpa	
Water Temperature	34℃~40°C	ľ
Temp. Adjustment	5 levels	
Dryer Temperature	41°C~53°C	
Temp. Adjustment	5 levels	





MODEL: KL - 03 - EN

UPCOMING PRODUCT



MODEL: KL - 05 - EN

- Integrated Toilet
- Auto-Flush
- Auto Open/Close
- Display LED Screen

Size	680*390*450mm	
Wall~Flush Center	305mm	
Cord	1.4m	
Seat	Instant Heating	
Seat Temperature	34°C~40°C	
Temp. Adjustment	5 levels	
Water Pressure	0.1Mpa ~ 0.75Mpa	
Water Temperature	34°C~40°C	
Temp. Adjustment	5 levels	
Dryer Temperature	41°C~53°C	
Temp. Adjustment	5 levels	



PRODUCT MODELS

MODEL
YM - 01 - EN



STANDARD MODEL

- Soft Cleanse
- Soft Closing

MODEL
KM - 01 - EN



ADVANCED MODEL

- Separate Sanitary Nozzles
- Activated Carbon Deodorizer

MODEL
KM - 03 - EN



ADVANCED MODEL

- LED Screen



INTEGRATED MODEL

- Sophisticated bidet seat
- Auto open/close
- Auto flush




INTEGRATED MODEL

- Refined bidet seat
- Auto flush

STANDARD MODEL

Instant heating











Front Cleanse



Soft Cleanse



Massage Cleanse



Adjustable Nozzle Position



Adjustable Water Pressure



Adjustable Water Temperature



Adjustable Seat Temperature



Air Drye



Soft Closing



Auto Nozzle Cleaning



Night Light



Infrared Sensor



Electrical Leakage Protection



Auto Eco-Mode



	Size	517*440*114mm
	Weight	3.96kg
10	Power Cord	1.5m
Ë	Model	Instant Heating
i i i	Seat Temperature	33℃~39℃
Specifications	Temperature Adjustment	4 levels
	Water Pressure	0.05Mpa~0.75Mpa
ed	Water Temperature	33℃~39℃
•	Stabilizing Frame Length	130mm~210mm
	Dryer Temperature	32℃~62℃

-
100 mg
-
9.1
W-48
- 10
O)
P-465
COLUMN
1
100
103
O.
-
and the
0
D-16
b4
(4)
LAT COMPANY
930

External Filter	Eliminate impurities from water input
T-shape Valve	Divide water input into water tank and BeauLet
Rubber Screw	Stabilize installation frame into BeauLet
Installation Frame	Adjust position between BeauLet and toilet bowl
Water Hose	Carry water into BeauLet





Rear Cleanse



Air Dryer



Front Cleanse

Dryer Temperature



Massage Cleanse



Soft Closing



Adjustable Nozzle Position



Nozzle Cleaning



Adjustable Water Pressure



Night Light



Adjustable Water Temperature



Activated Carbon Deodorizer



Adjustable Seat Temperature



Control Lock

Infrared Sensor Leakage Protection



Separate Sanitary Nozzles



Auto Eco-Mode




	Size	508*381*151mm
	Weight	6kg
v	Power Cord	1.5m
ecifications	Mode	Instant Heating
Ė	Seat Temperature	33℃~39℃
<u>.ŏ</u>	Temperature Adjustment	4 levels
<u>=</u>	Water Pressure	0.06Mpa~0.75Mpa
ě	Water Temperature	33℃~39℃
Sp	Temperature Adjustment	4 levels
	Dryer Temperature	32℃~62℃
	Temperature Adjustment	4 levels

Accompanying Parts	External Filter	Eliminate impurities from water input
	T-shape Valve	Divide water input into water tank and BeauLet
	Rubber Screw	Stabilize installation frame into BeauLet
	Installation Frame	Adjust position between BeauLet and toilet bowl
	Water Hose	Carry water into BeauLet
¥	Wrench	Tighten parts during installation

ADVANCED MODEL

Graceful Design







Rear Cleanse



Front Cleanse



Massage Cleanse



Adjustable Nozzle Position



Adjustable Water Pressure



Adjustable Water Temperature



Air Dryer



Adjustable Seat Temperature



Control Lock



Separate Sanitary Nozzles



Adjustable Dryer Temperature



Soft Closing



Auto Nozzie Cleaning



Night Light



Activated Carbon Deodorizer



Infrared Sensor



Electrical Leakage Protection



Auto Eco-Mode



LED Screen




	Size	508*381*151mm
	Weight	6kg
<u>v</u>	Power Cord	1.5m
5	Mode	Instant Heating
韦	Seat Temperature	33℃~39℃
<u>ŏ</u>	Temperature Adjustment	4 levels
5	Water Pressure	0.06Mpa~0.75Mpa
Specifications	Water Temperature	33℃~39℃
š	Temperature Adjustment	4 levels
	Dryer Temperature	32°C~62°C
	Temperature Adjustment	4 levels

un
5
ă.
9
0.3
ō
O
0
4

External Filter	Eliminate impurities from water input
T-shape Valve	Divide water input into water tank and BeauLet
Rubber Screw	Stabilize installation frame into BeauLet
Installation Frame	Adjust position between BeauLet and toilet bowl
Water Hose	Carry water into BeauLet
Wrench	Tighten parts during installation

INTEGRATED MODEL

High-End Design

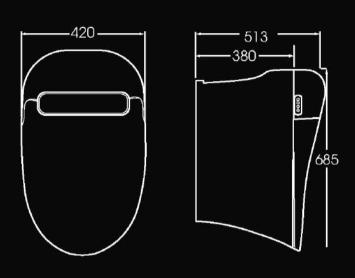





Rear Cleanse



Front Cleanse



Massage Cleanse



Adjustable Nozzle Position



Adjustable Water Pressure



Adjustable Water Temperature



Adjustable Seat Temperature



Air Dryer



Adjustable Dryer Position



Separate Sanitary Nozzles



LED Screen



Auto Open/Close



Auto Nozzle Cleaning



Night Light



Activated Carbon Deodorizer



Infrared Sensor



Electrical Leakage Protection



Auto Eco-Mode



Auto Flush



Siphon Flush




	Size	685*420*513mm
j	Wall Flush Output	305mm
ا م	Power Cord	1.5m
specifications	Model	Instant Heating
5 [Seat Temperature	33°C~39°C
} [Temperature Adjustment	4 levels
[]	Water Pressure	0.10Mpa~ 0.75Mpa
	Water Temperature	33°C~3 9 °C
	Temperature Adjustment	4 levels
	Dryer Temperature	32°C~62°C
	Temperature Adjustment	4 levels

Accompanying Parts	Remote Control	Adjust various functions of BeauLet
	T-shape Valve	Divide water input into water tank and BeauLet
	Water Valve	Adjust water input pressure
	installation Base	Stabilize BecuLet to bothroom floor, recommended to use with white cement
	Wrench	Tighten parts during installation

INTEGRATED MODEL

High-End Design







Rear Cleanse



Front Cleanse



Massage Cleanse



Adjustable Nozzle Position



Adjustable Water Pressure



Adjustable Water Temperature



Separate Sanitary Nozzles



Adjustable Seat Temperature



Air Dryer



Adjustable Dryer Position



Soft Closing



Auto Nozzie Cleaning



Night Light



Activated Carbon Deodorizer



Infrared Sensor



Electrical Leakage Protection



Auto Eco-Mode



Auto Flush



Siphon Flush



	Size	650*395*514mm				
	Wall~ Flush Output	305mm				
] ي	Power Cord	1.5m				
Specifications	Model	Instant Heating				
₹	Seat Temperature	33°C~39°C				
Ę.	Temperature Adjustment	4 levels				
<u> </u>	Water Pressure	0.10Mpa~ 0.75Mpa				
<u>Š</u> [Water Temperature	33°C~39°C				
	Temperature Adjustment	4 levels				
	Dryer Temperature	32°C~62°C				
	Temperature Adjustment	4 levels				

Accompanying Parts


Remate Control	Adjust various functions of BeauLet
T-shape Valve	Divide water input Into water tank and BeauLet
Water Valve	Adjust water input pressure
Installation Base	Stabilize BeauLet to bathroom floor, recommended to use with white cement
Wrench	Tighten parts during Installation

Electrical Technologies of ARCA



Auto Open/Close

The lid will automatically open when approached and close when user leaves.




Auto Siphon Flush


The water level is automatically adjusted after each use.

Advanced enamel technology prevents dirt accumulation.

Ensured flushing efficiency with water amount 5L/flush (1.3 gal/flush).









Electrical Safety System

The electrical system is IPX4 certified to prevent shock.


Anti-leakage plug with auto-breaker in case of open circuit.


Standard heat control, burn resistant, protective layer against overheating.



Auto Nozzle-Cleaning Technology

Nozzle will be auto-cleaned with hot water before and after every use to ensure sanitation for next use.

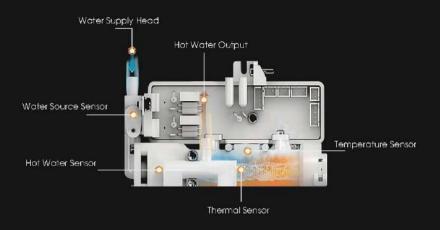





Instant Heating System

Heats water separately from power source, maintaining constant temperature.

This direct heating technology is integrated in all of ARCA's products.



Uses an activated carbon system to sterilize and eliminate unpleasant smells.

Air Dryer System

Modern dryer system with ventilator and improved endurance. The temperature can be manually adjusted.







Separate Cleansing System

Front and rear cleanse each use a different nozzle.

Effective design shields nozzles from external bacteria.

Easy to replace.

ARCA Filtering System

Filter protects you from impurities in water that normal eyes cannot detect.

It also prevents the hose and nozzle from being jammed.





We recommend changing the filter every 6 months.

Installation Dimensions

Electronic Bidet Seat

Technical Drawings





Please check the specifications before purchasing


	Details	Size (mm)
А	Distance from end of water tank to end of bowl	490≤A≤550
В	Distance between installation holes	140~205
С	Distance between installation holes and water tank	≥20


- Please do not use water input with high corrosiveness such as impure water, sea water, etc.
- Recommended water input pressure: 0.05~0.75MPa

Installation Dimensions

Integrated Toilet Bowl

Technical Drawings





Please check the specifications before purchasing

	Details	Size (mm)
Α	Distance from edge of plug-in to center of bowl	≥350mm
В	Distance from water valve to ground	≥100mm
С	Distance from electric plug to ground	≥300mm
D	Distance from water valve to center of bowl	≥280mm
Е	Distance from wall to flush center	305mm

- Please do not use water input with high corrosiveness such as impure water, sea water, etc.
- Recommended water input pressure: 0.05~0.75MPa

@								
BeauLet®	Product Line	Product Photo	Dimensions (mm)	Rear Cleanse	Front Cleanse	Massage Cleanse	Soft Cleanse	Adjustable Water Pressure
YM - 01 - EN	Standard Model Electronic Bidet Seat	ACC	517 x 370 x 114					
KM - 01 - EN	Advanced Model		508 x 381 x 151					
KM - 03 - EN	Electronic Bidet Seat		508 x 381 x 151					

	Contr	ol Functions		Advanced Functions								Other
Water Temperature	Nozzle Position	Seat Temperature	Dryer Temperature	Seat Heater	Air Dryer	Deodorizer	Auto Nozzle Clean	Eco Mode	Auto Flush	Auto Open/Close	Night Light	Can Flush During Blackout
•					•	•	•	•			•	
•	•	•	•	•	•	•	•	•			•	

BeauLet [®]	Product Line	Product Photo	Dimensions (mm)	Rear Cleanse	Front Cleanse	Massage Cleanse	Soft Cleanse	Adjustable Water Pressure
KL - 01 - EN * Limited Stock (No longer in Production)			685 x 420 x 513	0	•			
KL - 02 - EN	Integrated Model		650 x 395 x 514	•				
KL - 03 - EN	Products		660 x 405 x 526		•			
XI 05 - EN	Upcoming Products		680 x 390 x 450					

	Control Functions					Advanced Functions							
Water Temperature	Nozzle Position	Dryer Position	Seat Temperature	Dryer Temperature	Seat Heater	Air Dryer	Deodorizer	Auto Nozzle Clean	Eco Mode	Auto Flush	Auto Open/Close	Night Light	Can Flush During Blackout
•		•				•			•	•		•	
		•				•	•		•	•		•	•
•	•	•	•			•	•		•	•		•	•
	0	0							0	•			

NOTABLE INSTALLATIONS





GOLFZON PUBLIKA KUALA LUMPUR, MALAYSIA



PUDONG INTERNATIONAL AIRPORT SHANGHAI, CHINA

MARCO POLO RESIDENCE CEBU, PHILIPPINES



ARCA CO., LTD.

30 Tekunohiruzu, Taiwa City, Kurokawa District, Miyagi Prefecture, Japan TEL: +81-(0)22-725-7396 Fax: +81-(0)22-725-7397 Web: http://www.arca-2011.co.jp
E-mail: toiawase@arca-2011.co.jp

ARCA (Nantong) Electronic Technology Co., Ltd.

Building No.5, Jufeng Industrial Park, Nantong Hi-tech Industrial Development Area, Nantong, Jiangsu Province, China TEL: +86-(0)513-8602-9550 Web: www.arca-sh.com E-mail: arca@arca-sh.com

ARCA (Nantong) Electronic Technology Co., Ltd. (Beijing Branch)

Room 8121, Building A, Yingte Business Park, West Qiukeshu Road, Tongzhou District, Beijing, China TEL: +86-(0)10-5646-6558

Shanghai ARCA Trading Co., Ltd.

Room 625, Lane 1518, Jinshajiang Road, Putuo Distric, Shanghai, China TEL: +86-(0)21-6025-5870

ARCA Vietnam Service Trading Co.,Ltd.

No.18 CityLand Park Hills Apartments, Phan Van Tri Street, Ward 10, Go Vap District, Ho Chi Minh City, Vietnam TEL: +84-(0)28-6287-4187

BEAULET ARCA MALAYSIA SDN BHD

A2-G2-8 Solaris Dutamas, No.1, Jalan Dutamas 1, 50480 KL (Publika), Malaysia TEL: +60-32-303-5883

ARCA Co., Ltd.

Add: 30, Tekunohiruzu, Taiwa-cho, Kurokawa-gun, Miyagi-Prefecture, Japan.

Tel: (+81)22-725-7396 Fax: (+81)22-725-7397 www.arca-2011.co.jp

